



[Ver. 2026.04.14]

음향 기술정보 안내

SOUND TECHNICAL INFORMATION

아르코꿈밭극장

ARKO Kkumbat Theater



## 아르코꿈발극장 음향 장비 목록(Sound Equipment)

품목(Item)	모델명(Model)	사양(Specification)	수량 (Quantity)	비고 (note)
<b>AUDIO MIXING CONSOLE</b>				
Console	MIDAS m32	32ch Mono xlr In 8ch 55 trs In 25 Mix Bus / 16 Bus ch / 6 Matrix	1EA	Main Console (Fixed)
I/O (4~5p 참고)	MIDAS DL16 (Digital I/O)	Analog xlr 16 In Analog xlr 8 Out	2EA	(Fixed)
	Analog I/O Panel	Analog xlr 8 In / Analog xlr 4 Out STP 2 / SDI 1 / Powercon 1	4EA	(Fixed)
	Analog I/O Panel	Analog xlr 24 In / Analog xlr 16 Out STP 3 / MADI(SDI) 2 / Powercon 3	1EA	(Fixed)
	Analog I/O Panel	Analog xlr 2 In / Analog xlr 2 Out STP 2 / Powercon 1	1EA	(Fixed)
<b>AMP/Speaker Management System</b>				
Amp/Speaker Management System	Powersoft X4 DSP+D	8Ω 1600w x 4ch / 4Ω 3000w x 4ch / 2Ω 5200w x 4ch	2EA	(Fixed)
Amp	OPAL AUDIO PLX6.5	8Ω 1300W x 2ch / 4Ω 2100w x 2ch / 2Ω 3200w x 2ch	1EA	(Fixed)
Amp	ATAKA T8000	8Ω 1100w x 2ch / 4Ω 2200w x 2ch	1EA	
<b>REPRODUCTION DEVICES / RECORDER / EDITOR</b>				
Media Player	TASCAM CD-400U	CD/USB/SD card/Bluetooth	1EA	(Fixed)
<b>SPEAKER SYSTEM</b>				
Main Speaker System	McCauley 112-96N	LF 400w AES / 100dB 1w, 1m HF 75w AES / 107dB 1w, 1m	4EA	Main (Fixed)
Sub Woofer	McCauley 115-SB	500w RMS / 96dB 1w, 1m	2EA	Sub Woofer (Fixed)
Monitor Speaker	LSS M30.3	LF 200w AES / 93dB 1w, 1m HF 50w AES / 95dB 1w, 1m	2ea (1ch Dual Mono)	High Side Monitor (Fixed)
Extra Speaker	LSS M30.3	LF 200w AES / 93dB 1w, 1m HF 50w AES / 95dB 1w, 1m	2EA	Point Source (Passive)



WIRELESS MICROPHONES				
W/L Receiver	Shure QLXD	925.000 ~ 937.500 Mhz	12	(Fixed)
W/L Handheld Transmitter	Shure QLXD/SM58	925.000 ~ 937.500 Mhz	3	(Fixed)
W/L Handheld Transmitter	Shure QLXD/Beta58	925.000 ~ 937.500 Mhz	1	(Fixed)
W/L Bodypack Transmitter	Shure QLXD	925.000 ~ 937.500 Mhz	8	(Fixed)
Pin Mic	(TA4F 4pin)		6	(Fixed)

WIRED MICROPHONES				
Microphone	Shure SM57	Dynamic	4EA	공발극장 별도 보유
	Shure Beta57A	Dynamic	2EA	
	Shure SM58	Dynamic	2EA	
	Shure Beta58A	Dynamic	2EA	
	Rode NT5 Matchecd pair	Condenser	1SET (총 2EA)	

MICROPHONE STAND				
T-tpye	Long		5EA	Black
	Short		4EA	Black
	middle		2EA	Black
보면대(Canterbury)				
Bando BD-609			5	Black
DI Box				
DI Box	Radial ProD2	Passive 2ch	2EA	공발극장 별도 보유
	Klark Teknik	Active 1ch	2EA	




아르코꿈발극장 음향 공연장 in/out 패치 배치도





MIDAS DL16 (2EA)	Analog xlr 16 In Analog xlr 8 Out	B1 후무대
Analog I/O Panel	Analog xlr 8 In / Analog xlr 4 Out STP 2 / SDI 1 / Powercon 1	B2 무대 패널 1,2,3,4
Analog I/O Panel	Analog xlr 24 In / Analog xlr 16 Out STP 3 / MADI(SDI) 2 / Powercon 3	B2 후무대 패널 5
Analog I/O Panel	Analog xlr 2 In / Analog xlr 2 Out STP 2 / Powercon 1	그리드 상부패널 1,2,3,4

### 아르코꿈발극장 음향 Block Diagram (Fixed)

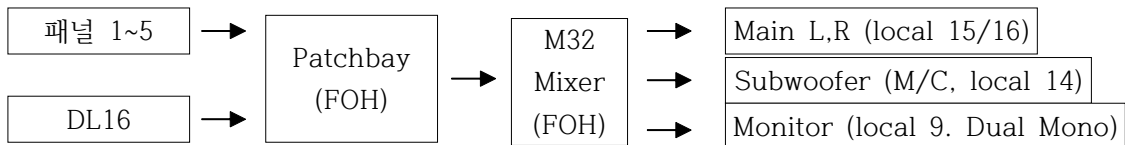

**\* 공연 전 장비의 사용 및 수량에 대해 반드시 극장 담당자와 협의 바랍니다\***

Please speak with the management  
About the usage of equipment before the  
performance.

Technical Support Division Sound Director  
Tel NO : 82)-02-3668-0083